



LINE@

Distributed by Global Mesh Communication Co., Ltd.
 Thanapat Property Building, 2nd Fl., 350 Ramintra Rd.,
 Tarang, Bangkhen, BKK 10230 Thailand
 T.662 509 9988 F. 662 509 8844



www.gmeshcomm.com



Gmeshcomm



Gmeshcomm

GMesH
 COMMUNICATION



CATALOG

Fanvil

ZYCOO

GLOBAL  **Power**

Smart Video IP Phone

by **Fanvil**



Fanvil C600

ดีไซน์สวยงามทันสมัย

ภาพคมชัด รองรับ VDO Call



ระบบปฏิบัติการ Android 4.2

หน้าจอกว้าง 7 นิ้ว ระบบสัมผัส

บันทึกการสนทนาได้เมื่อเสียบ Flash Drive

รองรับการ VDO Conference 3 สายพร้อมกัน

ภาพคมชัดความละเอียด 720P (VDO call resolution 1280x720P)

Hotel Phone

by **Fanvil**



รุ่น H3

รุ่น H5

ดีไซน์สวยงามทันสมัย

เข้ากับห้องพักทุกสไตล์



รองรับระบบ PoE ใช้ไฟเลี้ยงจากสาย LAN



สามารถปรับแต่งรูปแบบข้อมูลต่างๆ ได้บน Face plate



มี USB port สามารถชาร์ตไฟอุปกรณ์อื่นได้



ปุ่ม Soft keys จำนวน 6 ปุ่ม สำหรับตั้งค่าการโทรด่วน



เพิ่มรายละเอียด เช่น เบอร์โทรศัพท์ และที่อยู่ได้



หน้าจอสี LCD ขนาด 3.5 นิ้ว สามารถปรับ Background ได้





ระบบโทรศัพท์ IP Phone

สำหรับโรงแรม และ Service apartment ครบวงจร



- ครอบคลุมการบริหารจัดการทุกฝ่ายทั้งอาคารรวมถึงลานจอดรถ
- Design สวยทันสมัย Function หลากหลาย ในราคาที่ไม่สูงมาก
- ปรับแต่งการใช้งานให้เหมาะสมกับความต้องการของแต่ละสถานที่ได้
- ประยุกต์ใช้กับระบบรักษาความปลอดภัย ระบบเสียงตามสาย ระบบ Intercom ในกรณีฉุกเฉินต่างๆ รวมถึงระบบการคิดค่าใช้จ่ายภายในห้องพัก

ในชุดประกอบด้วย



IP PBX Zycos สามารถรองรับจำนวนเครื่องตั้งแต่ 1-500 เครื่อง



IP Phone Fanvil ตามการใช้งานต่างๆ



Fanvil PA2 สำหรับระบบเสียงตามสาย และเชื่อมต่อกับกล่องวงจรปิด



Zycos CooBill ระบบคิดค่าใช้จ่ายในห้องพัก



Fanvil SIP Doorphone ระบบ Access Control ที่มี Feature สำคัญมา



Fanvil SIP Intercom ที่สามารถเชื่อมต่ออุปกรณ์ไฟฟ้าฉุกเฉิน กล้องวงจรปิด และลำโพงเพื่อการสื่อสาร 2 ทาง

ระบบโทรศัพท์ IP Phone

สำหรับห้างสรรพสินค้า และ Community Mall ครบวงจร



- ครอบคลุมการบริหารจัดการทุกฝ่ายทั้งอาคาร
- Design สวยทันสมัย Function หลากหลาย ในราคาที่ไม่สูงมาก
- ปรับแต่งการใช้งานให้เหมาะสมกับความต้องการของแต่ละสถานที่ได้
- ประยุกต์ใช้กับระบบรักษาความปลอดภัย ระบบเสียงตามสาย ระบบ Intercom ในกรณีฉุกเฉินต่างๆ

ในชุดประกอบด้วย



IP PBX Zycos สามารถรองรับจำนวนเครื่องตั้งแต่ 1-500 เครื่อง



IP Phone Fanvil ตามการใช้งานต่างๆ



Fanvil PA2 สำหรับระบบเสียงตามสาย และเชื่อมต่อกับกล่องวงจรปิด



Fanvil SIP Doorphone ระบบ Access Control ที่มี Feature สำคัญมา



Fanvil SIP Intercom ที่สามารถเชื่อมต่ออุปกรณ์ไฟฟ้าฉุกเฉิน กล้องวงจรปิด และลำโพงเพื่อการสื่อสาร 2 ทาง



Solution ระบบรักษาความปลอดภัย พร้อมระบบ Intercom และ IP Camera ที่ทำงานบนระบบ IP อย่างสมบูรณ์


ทำงานระบบ IP สามารถเชื่อมต่อกับ AlarmLight และกล้องวิดีโอวงจรปิด สามารถบันทึกภาพ จากกล้องวงจรปิดได้โดยตรง ได้มาตรฐาน IP65 สามารถนำไปใช้กับ Solution ต่างๆได้หลากหลาย

Solution เสียงตามสายบนระบบ IP

ทำงานบนระบบ IP สามารถเลือกประกาศออกแต่ละจุด ได้แยกจากกัน เลือกประกาศเป็นกลุ่มที่ระบุไว้ และตั้งเวลา ส่องหน้าได้เหมาะกับการนำมาใช้แทนระบบ SIP Speaker ที่มีราคาแพง



Support two output short circuit for video surveillance and alarm light, two input short circuit for door phone button and emergency button.

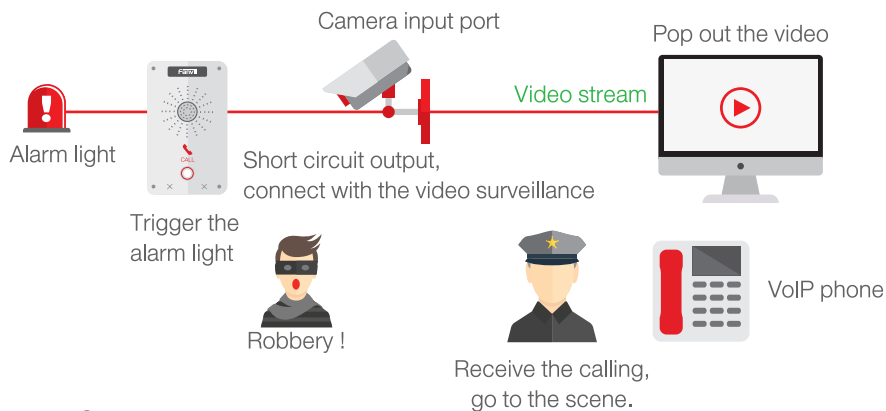

Fanvil i12 SIP Intercom

สามารถนำไปต่อกับลำโพง และ SIP Broadcast Server หรือ IP Phone เพื่อทำเป็นเครื่องกระจายเสียงได้



Support active speaker
Connect with active speaker
or loud speaker, broadcast
message or music



Public
Broadcasting




Command Dispatching



Intercom



Security

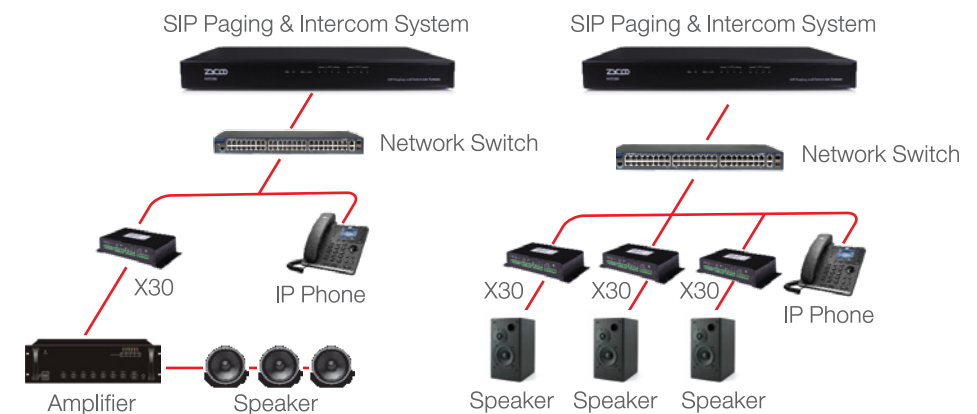

MX 500



X30



C20



Fanvil



COLOR SCREEN IP PHONE

SMART VIDEO PHONE

HOTEL IP PHONE

ATA & GATEWAY

INDUSTRY PRODUCT

PROFESSIONAL IP PHONE MANUFACTURER

IP Phone ดีไซน์สวย ทันสมัย
ด้วยฟังก์ชันที่มากกว่า แคมยังง่ายถูกกว่า

SIP Doorphone

Fanvil SIP อินเตอร์คอม และโทรศัพท์ประตูสำหรับสำนักงาน ที่พัก
ตอบสนองความต้องการสถานที่ที่ต้องการความปลอดภัย ทนทานต่อสภาพอากาศ
ระบบเสียงพูดคุยแบบแฮนด์ฟรีระดับเสียงคมชัด

Video Model:i30
Audio Model:i20S

- > Compatible with standard SIP protocol and main IPPBX/IMS platform
- > Build-in HD camera and LED, adopt H.264 codec(i30 only)
- > Access Control (By Call, By code, By IC/RFID card)
- > All-in-one (Access Control, Intercom and Broadcasting)
- > Build-in 3W speaker and AEC, support high quality hand-free communication
- > Support online management and upgrade
- > Protection level IP65



SIP Video Doorphone

Model:i31

- > Compatible with standard SIP protocol and main IPPBX/IMS platform
- > Access Control (By Call, By code, By IC/RFID card)
- > Build-in HD camera and IR, adopt H.264 codec
- > All-in-one (Access Control, Intercom and Broadcasting)
- > Build-in 3W speaker and AEC, support high quality hand-free communication
- > Support online management and upgrade
- > Protection level IP65 and IK10



SIP Paging Gateway PA2

PA2 SIP Video Intercom & Paging Gateway



Highlights

DIY DIY Intercom Solution

- A variety of interfaces enable you to quickly customize your intercom & paging solution, to suit a wide range of applications

Integration


- Support RTSP stream for monitoring the camera module (optional) connected with PA2
- Support video linkage with HIKVISION and DAHUA IP cameras to make video calls
- 2 standard RJ45 ports, one for WAN port, the other for video camera

Audio


- Support 7K bandwidth high quality HD voice on two-way intercom and broadcast
- Maximum 30W audio output, built-in Acoustic Echo Cancel-ler (AEC)
- Online or keypad adjusts volume output

Video


- Support plug and play for SIP HD video calls by using the special camera module
- Dual stream, high quality video to a NVR device for record ing/playback whilst monitoring with bandwidth efficiency on devices, including video IP phones

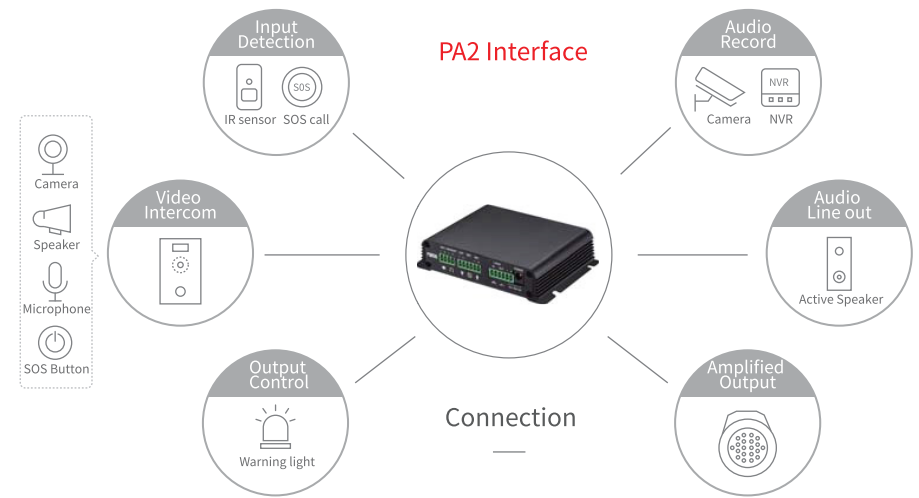

PA2 Application

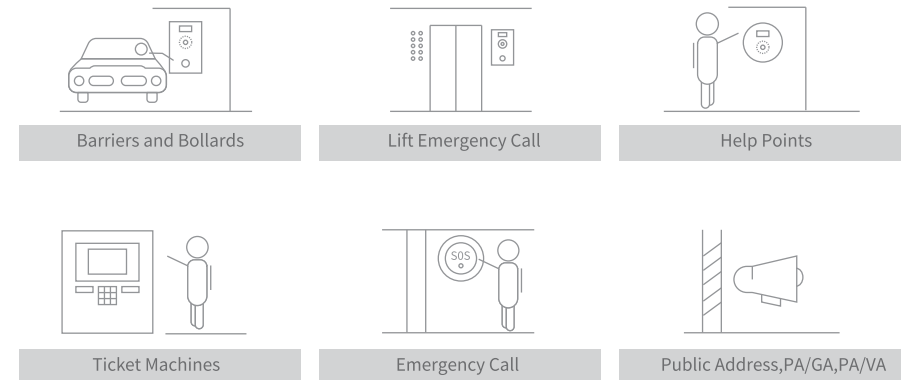

Parking Intercom Application Typical Connection

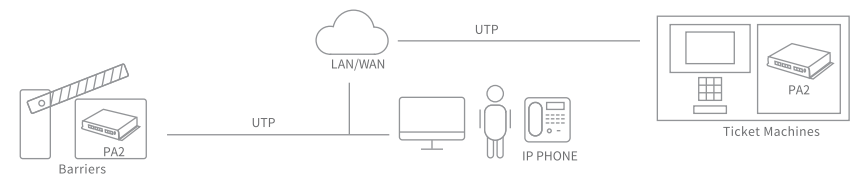

SECURITY AND INFORMATION OFFICE



X3S/X3SP/X3G Entry-Level Business IP Phone

With Color Screen and HD Voice

HD¹

Superb HD Audio Quality

PoE



Gigabit Ethernet with PoE Integrated(X3G)

EHS

Support EHS

Color Screen



RJ9 port for headset

Key Features

- 2 SIP lines, HD voice, 3-way conference, hotspot
- 2.4 inch (X3S, X3SP)/2.8 inch (X3G) color screen
- 10/100 Mbps Ethernet (X3S, X3SP), 10/100/1000 Mbps Ethernet(X3G)
- PoE enabled for X3G, X3SP
- Support call center headset (RJ9 port)
- Electronic Hook Switch (EHS) support for wireless headsets
- Support LDAP, XML phonebook
- Desktop / Wall-mount installation
- Standard Certifications: CE / FCC
- Compatible with major platforms:3CX, Avaya, Asterisk, Broadsoft, Metaswitch, Elastix etc.

X SERIES COLOR SCREEN IP PHONES

X5S

- 16 SIP lines, HD voice, 3-way conference, hotspot
- Dual-screen, 3.5 inch for main color screen, 64*192 for DSS monochrome screen
- Up to 40 DSS keys(8 physical), to provide dynamic DSS/BLF functions
- Gigabit Ethernet (10/100/1000 Mbps) with PoE enabled
- Support call center headset (RJ9 port)
- Electronic Hook Switch (EHS) support for wireless headsets
- One USB port for call recording(flash drive needed), and Bluetooth headset(USB Dongle needed)
- Support LDAP, XML phonebook
- Desktop / Wall-mount installation
- Standard Certifications: CE / FCC
- Compatible with major platforms:3CX, Avaya, Asterisk, Broadsoft, Metaswitch, Elastix etc.



X4/X4G

- 4 SIP Lines, HD voice, 3-way conference, hotspot
- Dual-color screen, 2.8 inch for main screen, 2.4 inch for DSS screen
- Up to 30 DSS keys(6 physical), to provide dynamic DSS/BLF functions
- 10/100 Mbps Ethernet (X4), 10/100/1000 Mbps Ethernet (X4G)
- Power over Ethernet (PoE) enabled
- Support call center headset (RJ9 port)
- Electronic Hook Switch (EHS) support for wireless headsets
- Support LDAP, XML phonebook
- Desktop / Wall-mount installation
- Standard Certifications: CE / FCC
- Compatible with major platforms:3CX, Avaya, Asterisk, Broadsoft, Metaswitch, Elastix etc.



X1/X1P (For Specified Countries)

- 500 contacts directory, caller IP, call holding / restoring, call transfer, supports headset
- 2-line operation allows you to dial and receive calls on two different phone lines
- Easy installation and web-based configuration
- Fast Ethernet—10/100Mbps Ethernet with PoE(X1P) enabled
- Support 3-party conference.
- Compatible with major platforms:3CX, Avaya, Asterisk, Broadsoft, Metaswitch, Elastix etc.



C SERIES ANDROID-BASED IP PHONES

Superb Communication Experience

มีระดับกับดีไซน์หรู พร้อมระบบปฏิบัติการ Android




Fanvil C600 Smart Video IP Phone

Enhancing Visual Communication



Key Features

- Android 4.2 operating system
- 6 SIP lines, HD voice, 3-way conference
- Support up to 140 DSS keys, to provide dynamic DSS/BLF functions
- 7 inch TFT 800×480 capacitive multi touch screen
- Video call resolution: QCIF/CIF/VGA/4CIF(1280*720P C600 only)
- CPU Freescale core quad 1 GHz
- Dual USB ports for call recording(flash drive needed), and Bluetooth headset(USB Dongle needed)
- Dual-port Gigabit Ethernet (10/100/1000 Mbps) with PoE enabled
- Support U Disk/TF card upgrade
- Standard HDMI port
- Support TF card up to 32GB
- Compatible with major platforms:3CX, Avaya, Asterisk, Broadsoft, Metaswitch, Elastix etc.



Fanvil X210 High-End Enterprise IP Phone

Deliver Convenience and Productivity



X SERIES COLOR SCREEN IP PHONES

Enhance Your Business Communication

Key Features

- 20 SIP lines, 3-way conference, hotspot
- HD audio on speakerphone and handset
- 4.3" main color display
- 2x3.5" side color displays for DSS keys
- Up to 106 DSS keys (42 tri-colored physical keys)
- Built-in Bluetooth
- Wi-Fi connectivity (via Wi-Fi dongle)
- Support EHS headset
- Dual Gigabit ports, integrated PoE
- Video Codec H.264 support for receiving video calls
- Stand with 2 adjustable angles of 40 and 50 degrees
- Compatible with major platforms: 3CX, Avaya, Asterisk, Broadsoft, Metaswitch, Elastix etc.



20 lines



HD Voice



3 Color Screens



Built-in Bluetooth



106 DSS



Wi-Fi Connectivity

Fanvil X7/X7C High-End Business IP Phone

With Touch Screen And Built-in Bluetooth



HD audio for speakerphone and handset



7-inch Capacity Touch Screen (X7)
* 5-inch for X7C



Gigabit Ethernet with PoE Integrated



IP Camera/SIP Video Door Phone Integration for door monitoring and one-touch unlocking



Up to 127 DSS Soft Keys (X7)
* Up to 60 DSS soft keys for X7C



Built-in Bluetooth Wi-Fi Connectivity

Key Features

- 20 SIP lines, 3-way conference, hotspot function
- HD audio on speakerphone and handset
- 7-inch (800*480) capacity touch screen TFT LCD for X7 (5-inch for X7C)
- Up to 127 DSS soft keys on X7 (60 for X7C)
- Built-in Bluetooth for connecting Bluetooth headset
- Wi-Fi connectivity (via Wi-Fi dongle)
- Dual Gigabit ports, integrated PoE
- Video codec H.264 support for receiving video calls
- Support EHS headset
- Stand with 2 adjustable angles of 40 and 50 degrees
- Compatible with major platforms: 3CX, Avaya, Asterisk, Broadsoft, Metaswitch, Elastix etc.



X7C





We Focus • We Deliver

ตู้สาขา IP PBX คุณภาพระดับโลก



ระบบสายภายใน | ระบบโทรศัพท์ออฟฟิศ | ระบบเสียงตอบรับอัตโนมัติ



Stereophonic Background Music

Thanks to the multicasting technology, MX500 can stream the original local music files to the SIP paging adaptors to playback. Unlike SIP which needs to convert the stream to 8KHz sampling and Mono, multicasting can do HD stereophonic background music.



Scheduled Broadcasting

School bell scheduling just got much easier with the scheduled broadcasting feature of MX500. Furthermore, a scheduled broadcasting task could also be scheduled on specific zone.



Public Addressing

By dialing a SIP paging adaptor number or a zone number, user could give a public address directly. By utilizing the external lines, external callers could also give a public address by dialing in to the MX500 system through the external line numbers.



Emergency Alarm/Broadcasting

Emergency alarm/broadcasting could be triggered automatically by sensors attached to the SIP paging adaptors, in the events of fire or intrusion. Manually triggering a emergency alarm/broadcasting can also be done by dial the emergency code or by triggering from the dispatcher panel.



Intercom

Intercom calls could be made from the "Press-to-Talk" button preconfigured on the SIP paging adaptors. In emergency situations by pressing the button to talk to security directly, the phone station in the security office will auto answer on speaker mode.



SIP Paging Management System



MX500 is a paging / intercom management system for SIP paging / SIP intercom terminal devices. It can interop with ZycOO SIP paging / SIP intercom devices for advanced features like: Unattended HD background music playing on specified time, zone with selected audio files. It is flexible to set / manage different zones for multitask broadcasting, emergency alarming, emergency intercom etc, which is a proper application for school, factory field, public transport station etc.



CooCenter Series Call Center



CooCenter Series is a call center solution that Zycoco lately launched dedicatedly for SMB. CooCenter is implemented applications and services as Call Center, IP PBX, Customer Relationship Management (CRM), telemarketing. It turns low price/performance ratio on, easy to deploy and user friendly.

Unified



Call Center,
IP PBX features.

Language



Chinese, English

CRM



Build-in with Customer
Relationship Management

Outbound Calls



Supports manually,
automatically follow-up call

Features

Call Center Features		IP PBX Features	
- Window-popup - Call Queue - ACD - CRM - Remote Login - Agent Web Login - Dedicated Agents - Click-to-Call - Auto Dial - Survey	- IVR - Call Recording - Call Statics - Call Logs - Follow-up Reminder - Rate Satisfaction - Call Monitor - Call Barge In	- Caller ID - Video Call - Paging / Intercom - DID - IVR - PIN Code - Call Recording 3-way conference - Conference Call - Call Forward/ Transfer /Park	- Black List - DND - Call Monitor - Whisper

ทำให้ธุรกิจของคุณ ออนไลน์อยู่เสมอ ด้วยสำนักงานเคลื่อนที่ของ CooCall

ดาวน์โหลด iOS
และ Android ด้วย
CooVox series IPPBX

ไม่พลาดสายสำคัญ
เมื่อคุณไม่อยู่ที่ออฟฟิศ

ลดค่าโทรผ่านมือถือ
ด้วยการโทรผ่าน
IP PBX ของบริษัท

เพิ่มประสิทธิภาพ
การติดต่อให้ดียิ่งขึ้น

LINE@

Powered by Zycoco

www.gmeshcomm.com

Gmeshcomm

Gmeshcomm

Distributed by Global Mesh Communication Co., Ltd.
Thanapat Property Building, 2nd Fl., 350 Ramintra Rd., Tarang, Bangkok, BKK 10230 Thailand T.662 509 9988 F. 662 509 8844

CooVox Unified Communication System



CooVox Series is a unified communication system for SMB, developed by Zycoco, with full PABX features for example Caller ID, Auto Answer etc, and advanced features as IP PBX: Remote Extension, IVR, Call Recording, Conference Call etc. CooVox series adapts small and medium business under 500 extensions, by attaching with EX16S FXS expansion box, CooVox can build a hybrid telephony network easily with no configuration required. Meanwhile, CooVox series provides flexible options for different trunks you may subscribe from any Telco, PSTN CO lines, GSM trunks, SIP trunks (VoIP). The CooVox system v3.0 software launched, revealed the up to date intuitive user interface as an IP PBX. More efficient applications, friendly way of administrator management will improve the SMB productivity and real enjoy while using the latest CooVox IPPBX.



Features

Codec & Protocol	Audio Codecs: Opus/G.722/G.711-Ulaw/G.711-Alaw/G.726/G.729/GSM/SPEEX Video Codecs: VP8/H.261/H.263/H.263+/H.264 Protocols: SIP (RFC3261)/IAX2 DTMF: RFC4733/SIP INFO/In-Band
Telephony Features	• IVR • Caller ID • Video Call • Paging and Intercom • Follow Me • One Number Stations • Music on Ringback • Call Queue • PIN Set • 3-Way Calling • Conference Calls • Call Parking • Call Waiting • Call Pickup • Call Transfer • Call Forward • Call Recording • Voicemail • Call Spy • Do Not Disturb (DND) • Distinctive Ringtone • DISA • Time Conditions • One Touch Recording • Wakeup Call • Smart DID • Blacklist
Advanced Features	• Quick Setup Wizard • Scan QR code to configure mobile extension (CooCall) • IP phone auto provisioning by PNP or Quick Register Code (H81, H83) • LDAP Phonebook auto configure (H81, H83) • Expansion box EX16S auto provisioning
Multi-user Login	• Admin: Highest management privileges • Operator: Manage Extension Users, Configure Advanced Telephony Features, Check Fax, Recording, Call Logs, etc. • Extension User: Web Extension (WebRTC), check local recording, voicemail, call logs.
Security Features	• Built-in Firewall • Geo-IP Security Policy • Intrusion Detection and Prevention
Network Features	• Network Type (WAN): DHCP, Static IP • VPN: PPTP (Server or Client), OpenVPN (Server or Client) • Static Routing • DHCP Server • DDNS

CooVox System Capacity

Item	CooVox-U20	CooVox-U50	CooVox-U60	CooVox-U80	CooVox-U100
Concurrent Calls	15(Max)	30(Max)	60(Max)	60(Max)	100(Max)
Extensions	32(Max)	100(Max)	200(Max)	200(Max)	500(Max)
Recordings and Voicemail	10000Mins	10000Mins	10000Mins	10000Mins	450000Mins
Conference Rooms	10	10	10	10	10
RAM	512MB DDR3	1GB DDR3	2GB DDR3L	2GB DDR3L	4GB DDR3L
Storage	16GB SD	16GB SD	16GB EMMC	16GB EMMC	16GB EMMC+500GB HDD

CooVox Telephony Modules

Module Name	CooVox-U20	CooVox-U50	CooVox-U60	CooVox-U80	CooVox-U100
FXOS (1FXO+1FXS)	√	×	√	×	×
FXO-200 (2FXO)	√	×	√	×	×
FXS-200 (2FXS)	√	×	√	×	×
4FXO	×	√	×	√	√
4FXS	×	√	×	√	√
2FXOS (2FXO+2FXS)	×	√	×	√	√
1GSM	√	×	×	×	×
2GSM	×	√	×	√	√
4GSM	×	√	×	√	√
2WCDMA(Voice)	×	√	×	√	√
4WCDMA(Voice)	×	√	×	√	√
1PRI (E1/T1)	×	×	×	√	√
ISDN BRI	2	×	×	4	4





ไฟฉุกเฉิน

Solar Cell

UPS

GLOBAL **Power**

แบตเตอรี่ โกลบอลพาวเวอร์



บริการ เปลี่ยนแบตเตอรี่

ประหยัดกว่าซื้อใหม่ถึง 50%

รับประกัน 1 ปีเต็ม



ไฟฉุกเฉิน



Solar Cell



UPS

ให้บริการถึงที่ไม่มีขั้นต่ำ

⚡️สำรวจ ⚡️ประเมินราคา ⚡️ติดตั้ง ⚡️ดูแลบำรุงรักษา(MA)
ด้วยทีมงานมากประสบการณ์

อัตราค่าบริการเปลี่ยนแบตเตอรี่

- ⚡️ ต่ำกว่า 10KVA ค่าบริการลูกละ 100 บาท
- ⚡️ มากกว่า 10KVA เป็นต้นไปทางบริษัทขอเข้าประเมินราคา (ราคานี้เฉพาะในเขต กรุงเทพมหานคร)



GLOBAL Power

ใช้กับอุปกรณ์

- ขนส่งไฟฟ้า
- เครื่องมือแพทย์
- ระบบการสื่อสาร
- ระบบพลังงานแสงอาทิตย์ Solar cell
- อุปกรณ์เตือนภัย
- แหล่งจ่ายไฟสำรอง (UPS)
- ไฟฉุกเฉิน



GTAG 2 SERIES

2V


AGM VRLA GENERAL PURPOSE BATTERY



MODEL	Voltage (V)	Capacity (Ah)	Resistance mΩ	Dimensions(mm)				Wight (KG)
				(L)	(W)	(H)	(TH)	
GTAG 2-100	2	100	1.4	170	72	226	226	5.2
GTAG 2-300	2	300	0.9	170	150	328	362	15.6
GTAG 2-400	2	400	0.7	210	176	330	362	22.8
GTAG 2-500	2	500	0.6	240	175	330	363	57.7
GTAG 2-600	2	600	0.5	300	175	340	364	32.5
GTAG 2-800	2	800	0.5	410	175	330	364	44.6
GTAG 2-1000	2	1000	0.45	475	175	328	366	51.5
GTAG 2-1500	2	1500	0.35	403	354	339	382	85
GTAG 2-2000	2	2000	0.28	490	350	343	382	107.9

Applications

- Tele-communication central station (wired or cellular)
- Power system communication, military communication, etc.
- Network communication including: data transmission, television signal transmission, etc.
- Uninterruptable Power System (UPS- for Telecom)



GLOBAL Power



สแกนเพื่อดูข้อมูล
Data Sheet แบบเตอร์รี่บัสเต็ม



GTAG 6 SERIES

6V

AGM VRLA GENERAL PURPOSE BATTERY



MODEL	Voltage (V)	Capacity (Ah)	Resistance mΩ	Dimentions(mm)				Wight (KG)
				(L)	(W)	(H)	(TH)	
GTAG 6-7	6	7	0.02	151	34	94	100	1

Applications

- Tele-communication central station (wired or cellular)
- Power system communication, military communication, etc.
- Network communication including: data transmission, television signal transmission, etc.
- Uninterruptable Power System (UPS- for Telecom)



GLOBAPower



สแกนเพื่อดูข้อมูล

Data Sheet แบบต่อรีดบับเต็ม

GTAG 12 SERIES


12V

AGM VRLA GENERAL PURPOSE BATTERY

MODEL	Voltage (V)	Capacity (Ah)	Resistance mΩ	Dimentions(mm)				Wight (KG)
				(L)	(W)	(H)	(TH)	
GTAG 12-1.3	12	1.3	9.0	97	45	52	57	0.57
GTAG 12-3	12	3	12.0	134	67	61	66	1.30
GTAG 12-5.5	12	5.5	30	90	70	101	107	1.6
GTAG 12-7.2	12	7.2	23	150	65	95	99	2.1
GTAG 12-7.5	12	7.5	26	151	65	94	98	2.3
GTAG 12-9	12	9	25	151	65	94	99	2.45
GTAG 12-10	12	10	17	151	98	95	99	3.1
GTAG 12-12	12	12	17	152	99	94	99.5	3.35
GTAG 12-18	12	18	16	181	77	167	167	5.1
GTAG 12-20	12	20	16	181	76	167	167	5.3
GTAG 12-26	12	26	15	175	166	125	127	7.2
GTAG 12-33	12	33	10	195	130	155	179	9.1
GTAG 12-40	12	40	10.5	196	165	175	182	12.4
GTAG 12-75	12	75	8	260	169	210	214	21
GTAG 12-90	12	90	5.2	306	168	210	220	25.1
GTAG 12-100	12	100	4.8	330	173	214	243	30.8
GTAG 12-120	12	120	4.0	407	173	208	233	32.3
GTAG 12-150	12	150	3.5	483	170	240	240	40.6
GTAG 12-170	12	170	2.7	522	240	218	244	50
GTAG 12-200	12	200	2.7	522	240	218	244	55
GTAG 12-250	12	250	2.7	522	268	218	226	60

Applications

- Tele-communication central station (wired or cellular)
- Power system communication, military communication, etc.
- Network communication including: data transmission, television signal transmission, etc.
- Uninterruptable Power System (UPS- for Telecom)



GLOBAPower



สแกนเพื่อดูข้อมูล

Data Sheet แบบต่อรีดบับเต็ม

GTGG 12 SERIES

12V

GEL BATTERY



MODEL	Voltage (V)	Capacity (Ah)	Resistance mΩ	Dimentions(mm)				Wight (KG)
				(L)	(W)	(H)	(TH)	
GTGG 12-26	12	26	15.8	165	125	175	182	7.5
GTGG 12-33	12	33	14.5	197	130	155	180	9.0
GTGG 12-44	12	44	10.5	197	165	176	182	11.9
GTGG 12-55	12	55	9.0	231	138	225	225	15.1
GTGG 12-65	12	65	8.2	348	167	178	178	41.8
GTGG 12-75	12	75	9.0	268	168	210	227	20.8
GTGG 12-100	12	100	5.5	407	173	208	233	28
GTGG 12-100(s)	12	100	5.5	330	173	212	243	28
GTGG 12-120	12	120	4.8	407	173	208	233	32
GTGG 12-150	12	150	2.7	485	170	240	240	41.5
GTGG 12-200	12	200	3.4	522	240	218	244	55.5
GTGG 12-250	12	250	2.0	522	240	218	244	62.5

Applications

- Tele-communication central station (wired or cellular)
- Power system communication, military communication, etc.
- Network communication including: data transmission, television signal transmission, etc.
- Uninterruptable Power System (UPS- for Telecom)



GLOBAPower



สแกนเพื่อดูข้อมูล
Data Sheet แบบต่อรีบบัสเต็ม

Distributed by Global Mesh Communication Co., Ltd.

Thanapat Property Building, 2nd Fl., 350 Ramintra Rd., Tarang, Bangkhen, BKK 10230 Thailand T.662 509 9988 F. 662 509 8844

GTGD 12 SERIES

12V


GEL & DEEP CYCLE BATTERY



MODEL	Voltage (V)	Capacity (Ah)	Resistance mΩ	Dimentions(mm)				Wight (KG)
				(L)	(W)	(H)	(TH)	
GTGD 12-40	12	40	9.0	196	165	175	182	11.8
GTGD 12-55	12	55	7.6	231	139	225	225	15.1
GTGD 12-65	12	65	7.4	348	167	178	178	19.0
GTGD 12-100	12	100	4.9	329	172	214	243	30.8
GTGD 12-120	12	120	4.0	407	173	208	233	32

Applications

- Tele-communication central station (wired or cellular)
- Power system communication, military communication, etc.
- Network communication including: data transmission, television signal transmission, etc.
- Uninterruptable Power System (UPS- for Telecom)



GLOBAPower



สแกนเพื่อดูข้อมูล
Data Sheet แบบต่อรีบบัสเต็ม

Distributed by Global Mesh Communication Co., Ltd.

Thanapat Property Building, 2nd Fl., 350 Ramintra Rd., Tarang, Bangkhen, BKK 10230 Thailand T.662 509 9988 F. 662 509 8844

GTAD 12 SERIES

12V


AGM DEEP CYCLE BATTERY



MODEL	Voltage (V)	Capacity (Ah)	Resistance mΩ	Dimentions(mm)				Wight (KG)
				(L)	(W)	(H)	(TH)	
GTAD 12-8	12	8	25	151	65	95	108	2.3
GTAD 12-10	12	10	17	151	98	95	99.5	3.4
GTAD 12-12	12	12	17	151	98	95	99.5	3.3
GTAD 12-24	12	24	12	165	125	175	182	7.5
GTAD 12-40	12	40	9.0	196	165	175	182	11.8
GTAD 12-55	12	55	7.6	231	139	225	228	15.1
GTAD 12-65	12	65	7.4	348	167	178	178	19.0
GTAD 12-70	12	70	4.9	260	169	210	217	21
GTAD 12-75	12	75	4.9	260	165	175	236	21
GTAD 12-100	12	100	4.9	329	172	214	243	30.8
GTAD 12-120	12	120	4.0	406	174	208	233	33.2
GTAD 12-150	12	150	2.5	483	170	240	240	41.1
GTAD 12-200	12	200	2.7	522	240	218	244	55.5

Applications

- Tele-communication central station (wired or cellular)
- Power system communication, military communication, etc.
- Network communication including: data transmission, television signal transmission, etc.
- Uninterruptable Power System (UPS- for Telecom)



GLOBALPower



สแกนเพื่อดูข้อมูล
Data Sheet แบตเตอรี่ฉบับเต็ม

GLOBALPower

แบบของคนไทย คุณภาพก้าวไกลระดับโลก
แรงดี พลังงานเสถียร กระแสไฟไม่ตก



ได้รับมาตรฐาน การรับรองอย่างถูกต้อง
สนใจแบบรุ่นอื่นๆสอบถามตัวแทนจำหน่ายได้ทั่วประเทศ