

GTAG12-33 12V33AH

AGM BATTERY- AGM SERIES



Specifications

Nominal Voltage	12V (6 cells per unit)	
Nominal Capacity (10HR)	33Ah/10.8V	
Dimensions	Length	195±2mm
	Width	130±2mm
	Height	155±2mm
	Total height	167±2mm
Approx. Weight	10.00kg±4%	
Terminal Type	T14	
Rated Capacity (25°C)	10HR (10.8V)	33Ah
	3HR (10.8V)	24Ah
	1HR (10.5V)	19Ah
Max. Discharge Current	330A (5 sec.)	
Max. Charging Current	9.9A	
Internal Resistance (Fully charged, 25°C)	Approx. 11mΩ	
Operating Temp. Range	Discharge	-15°C~50°C (5°F~122°F)
	Charge	-10°C~50°C (14°F~122°F)
	Storage	-20°C~50°C (-4°F~122°F)
Nominal Operating Temp.	25°C±3°C (77°F±5°F)	
Cyclic Charging Voltage (25°C)	14.60 to 15.00V Temperature compensation : -30mV/°C/Block	
Float Charging Voltage (25°C)	13.60 to 13.70V Temperature compensation : -18mV/°C/Block	
Capacity affected by temperature (10HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 months	Remaining capacity: 91%
	6 months	Remaining capacity: 82%
	12 months	Remaining capacity: 65%
Design Life	10 years for floating (25°C)	
	Eurobat (20°C): 10-12 years, long life.	

Applications

- ◆ Uninterruptable Power Supply (UPS)
- ◆ Electric Power System (EPS)
- ◆ Emergency backup power supply
- ◆ Alarm and security system
- ◆ Electronic apparatus and equipment
- ◆ Communication power supply

Remarks:

- Use in normal climate environment with standard range of regulated powered electricity.
- Falling, hitting, bending, etc. may cause degradation of battery characteristics.

Construction

Component	Positive plate	Negative plate	Container	Cover	Separator	Electrolyte	Safety valve	Terminal
Raw material	Lead dioxide	Lead	ABS	ABS	AGM	Sulfuric acid	Rubber	Copper/Lead

Constant current discharge characteristics unit: Ampere/Block (at 25°C, 77°F)


F.V/Time	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	71.9	55.4	33.2	20.4	12.1	8.68	6.93	5.92	4.07	3.36	1.78
9.90V	69.8	54.1	32.5	20.1	12.0	8.63	6.89	5.89	4.05	3.35	1.78
10.2V	66.9	52.1	31.5	19.6	11.9	8.57	6.85	5.85	4.02	3.34	1.77
10.5V	64.0	50.3	30.7	19.0	11.7	8.51	6.80	5.81	3.99	3.32	1.76
10.8V	60.4	47.7	29.6	18.4	11.4	8.26	6.59	5.63	3.87	3.30	1.75

Constant power discharge characteristics unit: Watt/Block (at 25°C, 77°F)


F.V/Time	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	777	609	372	232	140	102	81.5	70.0	48.4	40.1	21.4
9.90V	754	594	365	229	139	102	81.1	69.6	48.1	40.0	21.3
10.2V	723	572	354	223	138	101	80.5	69.1	47.8	39.9	21.3
10.5V	691	553	345	216	136	100	79.9	68.7	47.4	39.7	21.1
10.8V	653	524	332	209	132	97.1	77.5	66.6	46.0	39.4	21.0

Note 1: Above characteristics data can be obtained within three charge and discharge cycles.

Outer dimensions (mm)

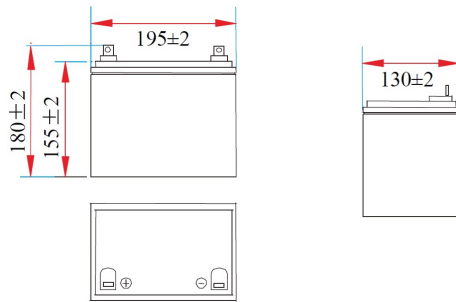


Terminal type (mm)

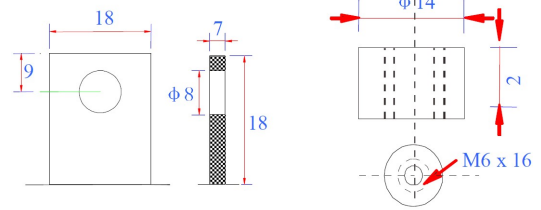


T6 (suit M6 bolt and nut)

T14
Torque: 5.1±0.6N.m


Discharge characteristics (25°C)

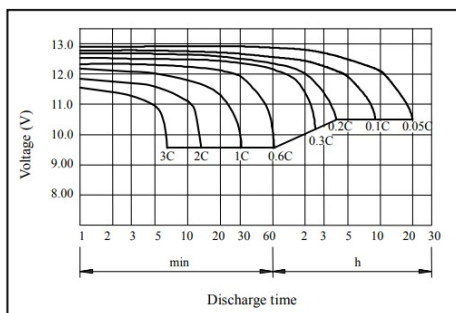


Charging characteristics (25°C)

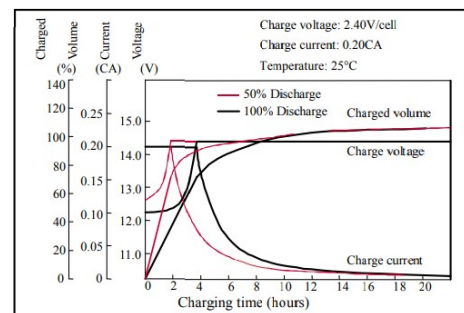


Temperature effects on capacity

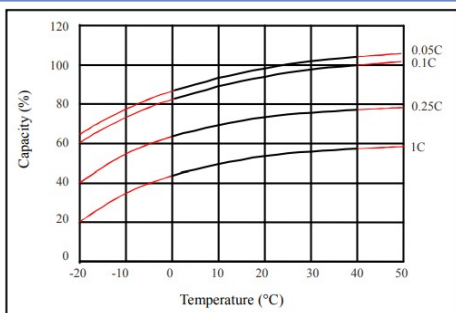


Self-discharge characteristics

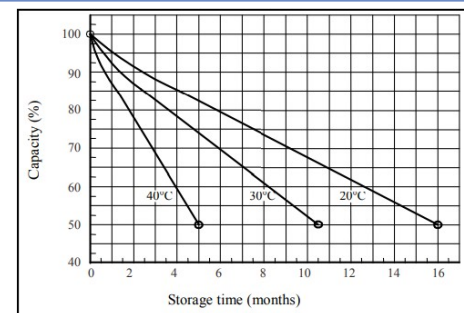


Floating life on temperature

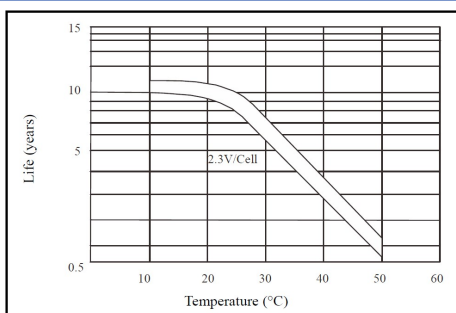

Cycle life on D.O.D (25°C)

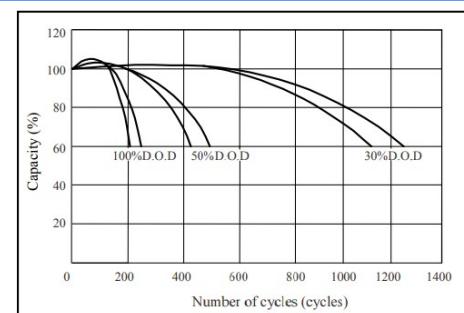

Relationship for OCV and capacity (25°C)

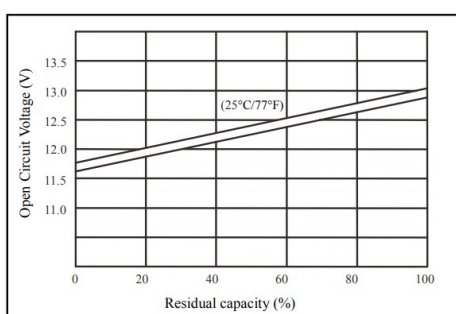

Relationship for charging voltage and temperature

