

GTAG12-100 12V100AH

AGM BATTERY- AGM SERIES



Specifications

Nominal Voltage	12V (6 cells per unit)	
Nominal Capacity (10HR)	100Ah/10.8V	
Dimensions	Length	330±2mm
	Width	171±2mm
	Height	214±2mm
	Total height	220±2mm
Approx. Weight	29.50kg±3%	
Terminal Type	T16	
Rated Capacity (25°C)	10HR (10.8V)	100Ah
	3HR (10.8V)	75Ah
	1HR (10.5V)	55Ah
Max. Discharge Current	800A (5 sec.)	
Max. Charging Current	30A	
Internal Resistance (Fully charged, 25°C)	Approx. 4.5mΩ	
Operating Temp. Range	Discharge	-15°C~50°C (5°F~122°F)
	Charge	-10°C~50°C (14°F~122°F)
	Storage	-20°C~50°C (-4°F~122°F)
Nominal Operating Temp.	25°C±3°C (77°F±5°F)	
Cyclic Charging Voltage (25°C)	14.60 to 15.00V Temperature compensation : -30mV/°C/Block	
Float Charging Voltage (25°C)	13.60 to 13.70V Temperature compensation : -18mV/°C/Block	
Capacity affected by temperature (10HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 months	Remaining capacity: 91%
	6 months	Remaining capacity: 82%
	12 months	Remaining capacity: 65%
Design Life	10 years for floating (25°C)	
	Eurobat (20°C): 10-12 years, long life.	

Applications

- ◆ Uninterruptable Power Supply (UPS)
- ◆ Electric Power System (EPS)
- ◆ Emergency backup power supply
- ◆ Alarm and security system
- ◆ Electronic apparatus and equipment
- ◆ Communication power supply

Remarks:

- Use in normal climate environment with standard range of regulated powered electricity.
- Falling, hitting, bending, etc. may cause degradation of battery characteristics.

Construction

Component	Positive plate	Negative plate	Container	Cover	Separator	Electrolyte	Safety valve	Terminal
Raw material	Lead dioxide	Lead	ABS	ABS	AGM	Sulfuric acid	Rubber	Copper

Constant current discharge characteristics unit: Ampere/Block (at 25°C, 77°F)

F.V/Time	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	218	168	101	61.8	36.5	26.3	21.0	18.0	12.3	10.2	5.40
9.90V	211	164	98.5	60.9	36.3	26.2	20.9	17.8	12.3	10.2	5.38
10.2V	203	158	95.5	59.3	36.0	26.0	20.7	17.7	12.2	10.1	5.37
10.5V	194	153	93.2	57.5	35.5	25.8	20.6	17.6	12.1	10.1	5.34
10.8V	183	144	89.7	55.6	34.6	25.0	20.0	17.1	11.7	10.0	5.30

Constant power discharge characteristics unit: Watt/Block (at 25°C, 77°F)


F.V/Time	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
9.60V	2354	1845	1128	705	423	309	247	212	147	122	64.7
9.90V	2284	1800	1105	694	421	308	246	211	146	121	64.6
10.2V	2190	1734	1071	676	417	306	244	209	145	121	64.4
10.5V	2095	1675	1045	655	411	303	242	208	144	120	64.0
10.8V	1978	1586	1007	634	400	294	235	202	139	119	63.6

Note 1: Above characteristics data can be obtained within three charge and discharge cycles.


GTAG12-100 12V100AH

AGM BATTERY- AGM SERIES


Outer dimensions (mm)

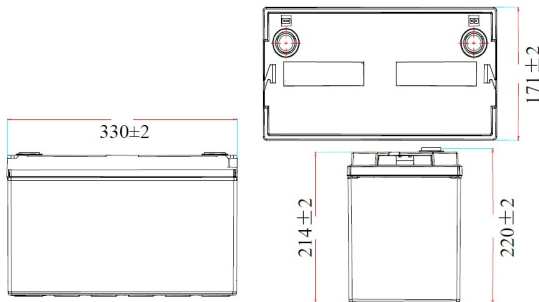


Terminal type (mm)

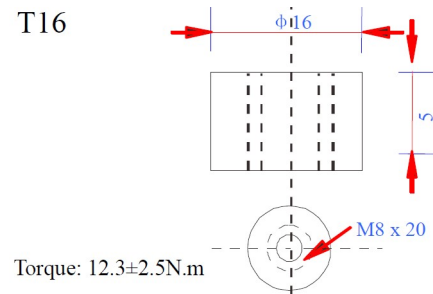


Discharge characteristics (25°C)

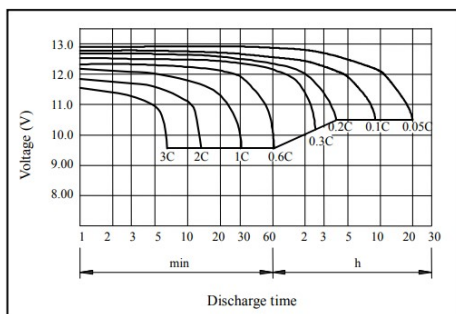


Charging characteristics (25°C)

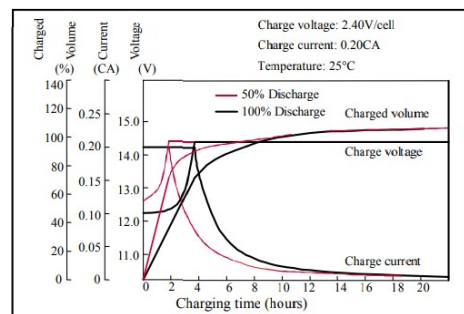


Temperature effects on capacity

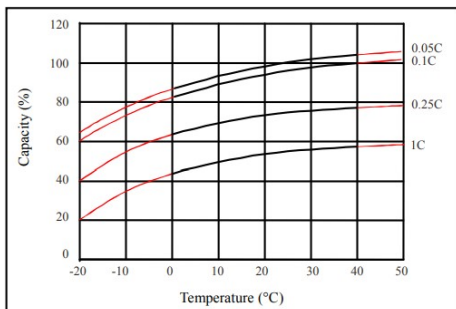


Self-discharge characteristics

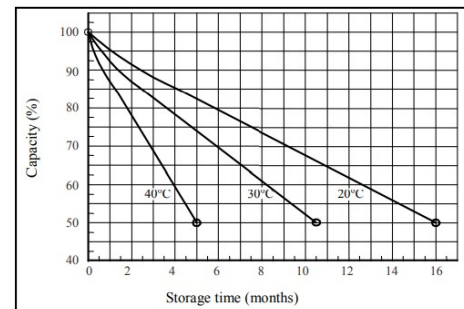


Floating life on temperature

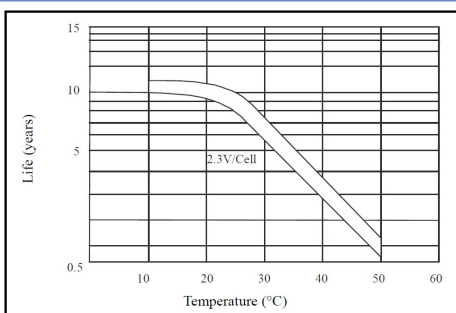

Cycle life on D.O.D (25°C)

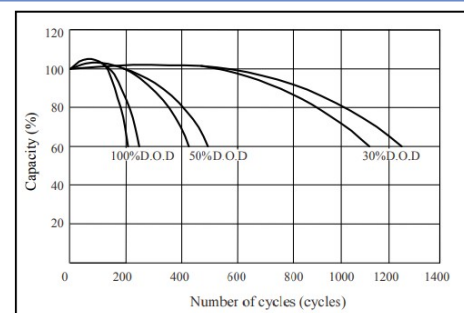

Relationship for OCV and capacity (25°C)

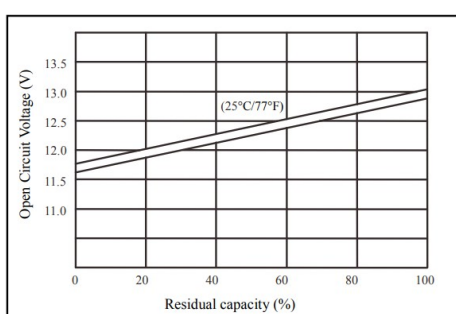

Relationship for charging voltage and temperature

